

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/076423 A1

(51) International Patent Classification⁷: **H01T 13/05**

(21) International Application Number:
PCT/SG2004/000033

(22) International Filing Date: 9 February 2004 (09.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **LAW, Seng, Teck** [MY/SG]; Block 4010, Ang
Mo Kio Avenue 10, #02-09, Tech Place 1, Singapore
569626 (SG).

(74) Agent: **DREW & NAPIER LLC**; 20 Raffles Place,
#17-00 Ocean Tower, Singapore 048620 (SG).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,


CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN OR RELATING TO AN ACCESSORY FOR A FUEL BURNING OR PROCESSING ENGINE
OR MACHINE"

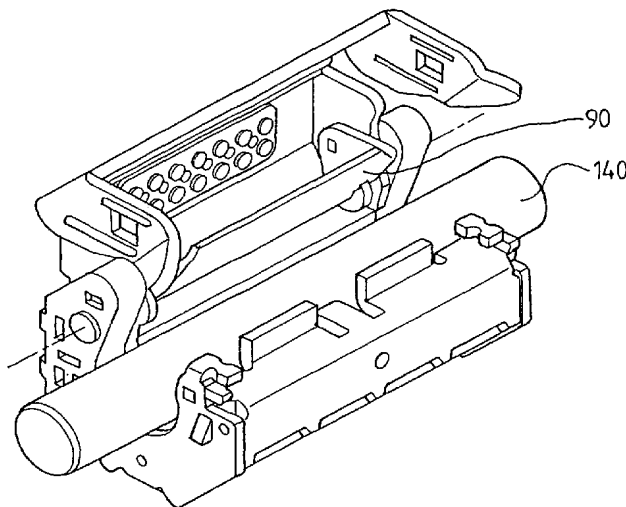

(57) Abstract: An accessory for a fuel burning or processing engine includes a housing having a lower housing element with a pivotally mounted cover, so that the housing may be snap-fitted to a high tension lead, such as the lead extending to a spark plug in an internal combustion engine. A core of semi-circular section; formed of a material having ferri-magnetic properties is present within the housing, the core defining a recess which receives the high tension lead. As the cover of the housing is closed, the high tension lead is clamped and retained in place in the recess. The ferri-magnetic core has high resistivity and low reluctance, and is preferably formed of ferrite.



WO 2005/076423 A1